

Diesel Powered Generating Sets 1005 kW - 1340 kW 50 Hz KTA50 Series Engines



Typical model with fitted options

Standard Genset Features

Single Source Responsibility

- Design, manufacturer and test of all components and accessories are made by Cummins Power Generation and Cummins companies

International Integrity

- Assurance and strength of a worldwide, world class corporation

Global Backing

- 24-hour spares and service support – in 72 countries

Single Source Warranty

- Complete genset covered by Cummins Power Generation comprehensive warranty

Packaged Self-Contained Units

- Units with built in antivibration systems with provision for base fuel tank and other accessories

Cummins Engine

- Heavy duty 4 cycle water cooled engine
- Electronic governor control

Cooling System

- 40°C cooling package (50°C option)

Ready Filled

- Every set comes filled with lube oil and anti-freeze

Alternator

- Brushless Group made machine
- Close voltage regulation
- Rotor and exciter impregnated with oil and acid resisting resin
- 12 lead reconnectable
- Exceptional short circuit capability
- Low waveform distortion with non linear loads
- Permanent magnet exciter with MX321 AVR fitted as standard

Ratings

All kW Power ratings based on a 40°C ambient temperature reference. No derating necessary up to 40°C

Chassis

Built-in anti-vibration system
Bonded rubber units fitted as standard eliminates need for rubber mats or spring mountings

PCL 'Power Control' System

- CE compliant
- Full AC instrumentation
- Emergency stop button
- Safety shutdowns
- Key or Remote starting

Alternative PCC PowerCommand Control System

- Microprocessor control
- Integrates governor and voltage regulation systems
- Superior alternator and genset protection system
- Accurate battery monitoring system
- Totally reliable and proven system




Quality Assurance
Registered Firm Certificate Number FM509 in accordance with:
BS EN ISO 9001
Quality Assurance Schedule 3420/1



Cummins Power Generation, Cummins Engines and Newage Alternators are all part of the same group

50 Hz Ratings					
Model Prime	Prime kW (kVA)	Model Standby	Standby kW (kVA)	Engine Model	TA-Luft Compliance
1005 DFLC	1005 (1256)	1120 DFLC	1120 (1400)	KTA50G3	—
1005 DFLG	1005 (1256)	1120 DFLG	1120 (1400)	KTA50G6	4.0 g/nm ³
1005 DFLH	1005 (1256)	1120 DFLH	1120 (1400)	KTA50G7	2.0 g/nm ³
1125 DFLE	1125 (1406)	1340 DFLE	1340 (1675)	KTA50G8	—

A Single Source for *all* Power System Solutions

Specifications

Generator Set Performance

Voltage Regulation

Maintains voltage output to within $\pm 0.5\%$.
At any power factor between 0.8 lagging and unity.

At any variations from No load to Full load.

At any variations from Cold to Hot.

At speed droop variations up to 4.5%.

Frequency Regulation

Isochronous under varying loads from no load to 100% full load.

Random Frequency Variation

Will not exceed $\pm 0.25\%$ of its mean value for constant loads – no load to full load.

Waveform

Total harmonic distortion open circuit voltage waveform in the order of 1.5%. Three-phase balanced load in the order of 5.0%.

Telephone Influence Factor

TIF better than 50.

THF to BS4999 Part 40 better than 2%.

Alternator Temperature Rise

Class H insulation. Temperature rise up to 125°C permitted.

Radio Interference

In compliance with BS800 and VDE levels G and N.

Engine

Cummins KTA50G3 and G8, sixteen-cylinder vee formation, direct injection, four-cycle diesel engines.

Type

Water cooled, turbocharged and aftercooled.

Construction

Four valves per cylinder, forged steel crankshaft and connecting rods, cast iron block, with replaceable wet liners.

Starting

24 volt negative earth, battery charging 35 amp alternator. Cranking current 1800 amps Amps at 0°C.

Fuel System

24 volt fail safe actuator, dual spin-on paper element fuel filters, Cummins PT fuel injection systems with integral electronic governor. Dual flexible fuel lines with connectors. Standard fuel water separator.

Filters

Dry element air filters with restriction indicator and spin-on paper element full flow and by pass lube oil filters. Spin on corrosion resistor filter.

Cooling

High ambient 40°C radiator as standard with 50°C ambient as option. Oil cooler.

Alternator

Type

Brushless, single bearing, revolving field, 4-pole, drip proof, screen protected.

Class H insulation.

Enclosed to IP22 (NEMA 1) standard.

IC 01 cooling system.

Fully interconnected damper winding.

AC exciter and rotating rectifier unit.

Epoxy coated stator winding.

Rotor and exciter impregnated with tropical grade insulating oil and acid resisting polyester resin. Dynamically balanced rotor to BS5625 grade 2.5.

Sealed for life bearings.

Layer wound mechanically wedged rotor.

Exciter

Triple dipped in moisture, oil and acid resisting polyester varnish and coated with anti-tracking varnish.

Sealed solid state automatic voltage regulator – self-exciting, self-regulating.

Output windings with 2/3 pitch for improved harmonics and parallelling ability.

Close coupled engine/alternator for perfect alignment.

Permanent magnet exciter with MX321 AVR fitted as standard.

Compliance Standards

To BS4999/5000 pt 99,
VDE 0530, UTE5100,
NEMA MG1-22, CEMA,
IEC 34, CSA A22.2,
AS1359, BSS5514,
ISO 3046 and ISO 8528

Chassis

Fabricated and welded steel chassis

Built-in anti-vibration mountings

Optional sub-base fuel tank with eight hour capacity, dual flexible fuel lines, dial type fuel gauge and drain bung

Finish

Etch undercoated and finished in high gloss durable green

General

Complete set of operating and instruction manuals

Generator Set Options

Engine

- Heavy duty air cleaner
- Coolant heater and thermostat
- Lead acid batteries, cable and fitted tray
- NiCad batteries
- Sump drain pump
- Oil and water drain taps
- CE Compliance (guarding)
- Exhaust temperature monitoring (PCC only)
- Tool kit
- Compliance to TA Luft

Cooling

- 50°C ambient radiator
- Remote radiator cooling (built to order)
- Oil temperature indication

Alternator

- Anti-Condensation heater
- Thermistors
- PMG Exciter and MX321 AVR
- 105°C rise alternator

Exhaust System

- Industrial type silencer
- Residential type silencer
- Length of flexible exhaust and bellows

Fuel System

- Sub-base tanks
- Hand fuel transfer pump
- Automatic fuel transfer pump
- Free-standing 450, 900 and 1350 litre fuel tanks with stand
- Fuel tank level switch
- High fuel level warning
- Low fuel level warning
- Low fuel level shutdown

Generator Set

- Weather protective enclosures
- Silenced enclosures

Control Panel

- See separate list on Control Panel pages
- 3 or 4 pole circuit breaker
- Battery charger 5 amp or 10 amp
- CE Compliance PCL and PCC systems
- Cable entrance box

Power Control System (PCL)

PCL – Power Control System

- Choice of manual/key start or remote/automatic system
- Set mounted control panel on anti-vibration mounts
- Integrated circuit breaker (optional)

Standard Specification

- Three ammeters 72 mm scale
- Voltmeter and selector switch
- Frequency (Hz) and RPM meter
- Hours run meter
- Oil pressure gauge
- Engine temperature gauge
- Battery condition meter
- Emergency stop shutdown pushbutton
- Dual scale indication
- Starting module (Manual or Remote)
- High engine temperature protection shutdown
- Low oil pressure protection shutdown
- Loss of coolant alarm and shutdown
- Overspeed/over frequency alarm and shutdown
- Underspeed/under frequency alarm and shutdown
- Status and fault conditions display by LED illumination
- Remote emergency stop connections

Manual System PCL-001

- Key switch off/manual start positions
- Manual start pushbutton

Remote/Auto Start System PCL-002 (option)

- Key switch off/auto and manual position
- Manual start pushbutton
- Fail to start LED indication
- Run on timer
- 3 attempts to start (adjustable) in auto mode
- Set will automatically start in event of receiving an external signal



PCL/Power Control – standard configuration PCL-001

Circuit Breaker*


- Either 3 or 4 pole optional moulded case circuit breakers can be fitted. Located adjacent to the control panel the breaker is complete with magnetic and thermal trips for plant protection against overload and short circuit conditions. Removable gland plate covers provide top or bottom cable entry and removable door over circuit breaker provides accessibility to load terminals. Extended load connections off the circuit breaker can be provided either as pads for lugged cables or cable connectors for bare (unlugged) cables up to 1250 ampere capacity

Optional Features to either Manual or Remote PCL System

- 5 or 10 Amp wall mounted battery chargers
- Audible alarm - fitted or loose
- Volts adjustment control
- Low fuel level alarm and/or shutdown
- Overload current protection
- Common fault contact
- Annunciator units - 5 or 10 warnings
- Under/Over volts shutdown
- CE compliance
- Low battery volts alarm
- Earth fault
- kW meter
- PF meter
- Oil temperature gauge
- 2 stage low oil pressure warning
- 2 stage high temperature warning
- High oil temperature warning or shutdown
- Remote Only:
 - Ready to accept load indicator
 - System energised indicator
 - Selector switch not-in-auto position indicator

Automatic – Mains Failure System PCL-005

- Module supplied loose or fitted in wall mounting cubicle
- Works in conjunction with System PCL-002
- Adjustable voltage sensing on all three phases
- Provides signal to generator to start
- Provides signal to changeover switchgear
- Key control switch. Auto ON (2) RUN (2)
- Test positions permit RUN ON or off load
- LED indication for mains/power status
- Timers for mains fail, return time, warming time

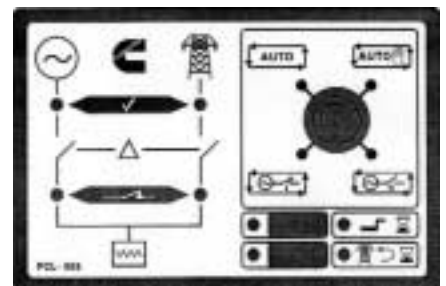

*Floor mounted cubicle provided with air circuit breaker on ratings over 2000 amps.

Alternative PowerCommand Control System (PCC)

PowerCommand® Control with AmpSentry™ Protection

- Integrated automatic voltage regulator and engine speed governor
- AmpSentry Protection guards the electrical integrity of the alternator and power system from the effects of overcurrent, over/under voltage, under frequency and overload conditions
- Control components designed to withstand the vibration levels typical in generator sets

Standard Control Description

- Analog % of current meter (amps)
- Analog AC frequency meter
- Analog AC voltage meter
- Analog % of load meter (kW)
- Cycle cranking control
- Digital display panel
- Emergency stop switch
- Idle mode control
- Menu switch
- Panel backlighting
- Remote starting
- Reset switch
- Run-Off-Auto switch
- Sealed front panel, gasketed door
- Self diagnostics
- Separate customer interconnection box
- Voltmeter/Ammeter phase selector switch

Standard Performance Data

AC Alternator Data

- Current by Phase
- Kilowatts
- Kilowatt Hours
- Power Factor
- Voltage Line to Line
- Voltage Line to Neutral

Engine Data

- Battery Voltage
- Coolant Temperature
- Engine Running Hours
- Engine Starts counter
- Oil Pressure
- RPM
- Oil Temperature

EMC Compliance

The PCC control system meets EMC Shield Regulations.



PCC PowerCommand Control – standard configuration with optional contactor buttons shown

Standard Protection Functions

Warnings

- High Coolant Temperature
- High DC Voltage
- Low Coolant Temperature
- Low DC Voltage
- Low Fuel – Day Tank
- Low Oil Pressure
- Over Current
- Oil Pressure Sender Fault
- Temperature Sender Fault
- Overload Load Shed Contacts
- Temperature Sender Fault
- Up to Four Customer Fault Inputs
- Weak Battery

Shutdowns

- Emergency Stop
- Fail to Crank
- Low Coolant Level (option for alarm only)
- Low Oil Pressure
- Magnetic Pickup Failure
- Overcrank
- Overcurrent
- Overspeed
- Short Circuit
- Underfrequency
- High/Low AC Voltage

Disconnecter Switch*

The addition of a circuit breaker is considered unnecessary when PowerCommand with Amp Sentry protection is fitted. For isolation purposes a switch disconnecter can be supplied and mounted in the normal circuit breaker position on either side of the control panel.

Voltage Regulation

±0.5% with PowerCommand fitted.


Options

Control panel PowerCommand options

- Audible alarm and shutdown
- Key switch-operating mode
- Shutdown alarm-relay
- Running relays 4 pole D.T.
- Warning low fuel/high fuel


- Shut down – low fuel level
 - Earth fault. Shutdown
 - High alternator temperature alarm/shutdown
 - PowerCommand Digital Paralleling
- #### Cummins Optional Network Communications
- Echelon LonWorks multidrop communication network up to 5000 feet (1523 m) in length
 - Allows for local and remote communications with PowerCommand network products
 - Power system monitoring and control using PowerCommand software
 - Flexible for interface with other manufacturers' control and monitoring systems
- Other PowerCommand Control options are available

*Floor mounted cubicle provided with air circuit breaker on ratings over 2000 amps.

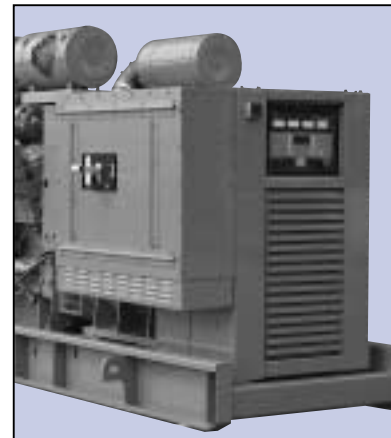

Circuit breaker can be fitted either side of generator set.

Technical Data

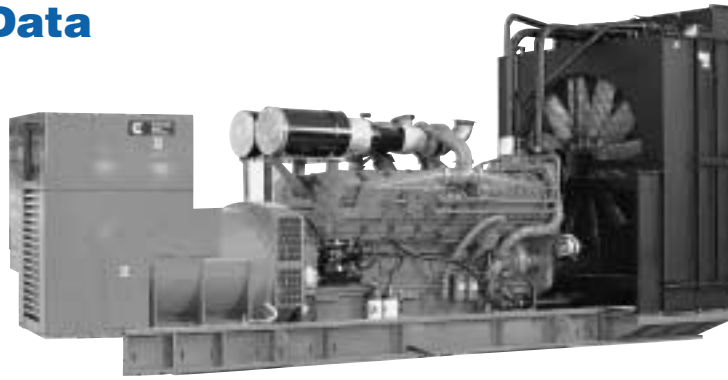

Model 1125 DFLE with 50°C radiator fitted.

Generating Sets – 50 Hz

Set output	380-440 V 50 Hz	380-440 V 50 Hz
Prime at 40°C ambient	1005 kWe 1256 kVA	1125 kWe 1406 kVA
New Model (Prime)	1005 DFLE	1125 DFLE
Standby at 40°C ambient	1120 kWe 1400 kVA	1340 kWe 1675 kVA
New Model (Standby)	1120 DFLE	1340 DFLE
Engine Make	Cummins	Cummins
Model	KTA50G3	KTA50G8
Cylinders	Sixteen	Sixteen
Engine build	60° Vee	Vee
Governor / Class	Electronic / A1	Electronic / A1
Aspiration and cooling	Turbo Aftercooled	Turbo Aftercooled
Bore and stroke	159 mm x 159 mm	159 mm x 159 mm
Compression ratio	13.9:1	14.9:1
Cubic capacity	50.3 Litres	50.3 Litres
Starting / Min °C	Unaided / 7°C	Unaided / 7°C
Battery capacity	254 A/hr	254 A/hr
Nett Engine output – Prime	1076 kWm	1168 kWm
Nett at flywheel – Standby	1206 kWm	1397 kWm
Maximum load acceptance – single step (cold)	640 kWe	900 kWe
Speed	1500 rpm	1500 rpm
Alternator voltage regulation	±0.5%	±0.5%
Alternator insulation class	H	H
Single load step to NFPA 110	100%	100%
Fuel consumption (Prime) 100% load	254 l/hr	289 l/hr
Fuel consumption (Standby) 100% load	282 l/hr	345 l/hr
Lubrication oil capacity	177 Litres	204 Litres
Base fuel tank capacity – open set	2000 Litres	2000 Litres
Coolant capacity – radiator and engine	351 Litres	400 Litres
Exhaust temp – full load prime	518°C	482°C
Exhaust gas flow – full load prime	13590 m ³ /hr	13842 m ³ /hr
Exhaust gas back pressure max (standby)	51 mm Hg	51 mm Hg
Air flow – radiator (40°C ambient)†	21.6 m ³ /s	21.7 m ³ /s
Pusher fan head (duct allowance) 40°C†	13 mm Wg	13 mm Wg
Air intake – engine (prime)	5166 m ³ /hr	5400 m ³ /hr
Air flow – radiator (50°C ambient)†	27.1 m ³ /s	28.4 m ³ /s
Pusher fan head (duct allowance) 50°C†	13 mm Wg	15 mm Wg
Total heat radiated to ambient	176 kW	210 kW
Engine derating – altitude	Refer to derate curves	Refer to derate curves
Engine derating – temperature	Refer to derate curves	Refer to derate curves

In accordance with ISO 8528, ISO 3046.


Prime: Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period.

Standby: Continuous running at variable load for duration of an emergency.

†Subject to factory verification.

For TA-LUFT engine parameters refer to factory.

Dimensions and Weights – 50 Hz

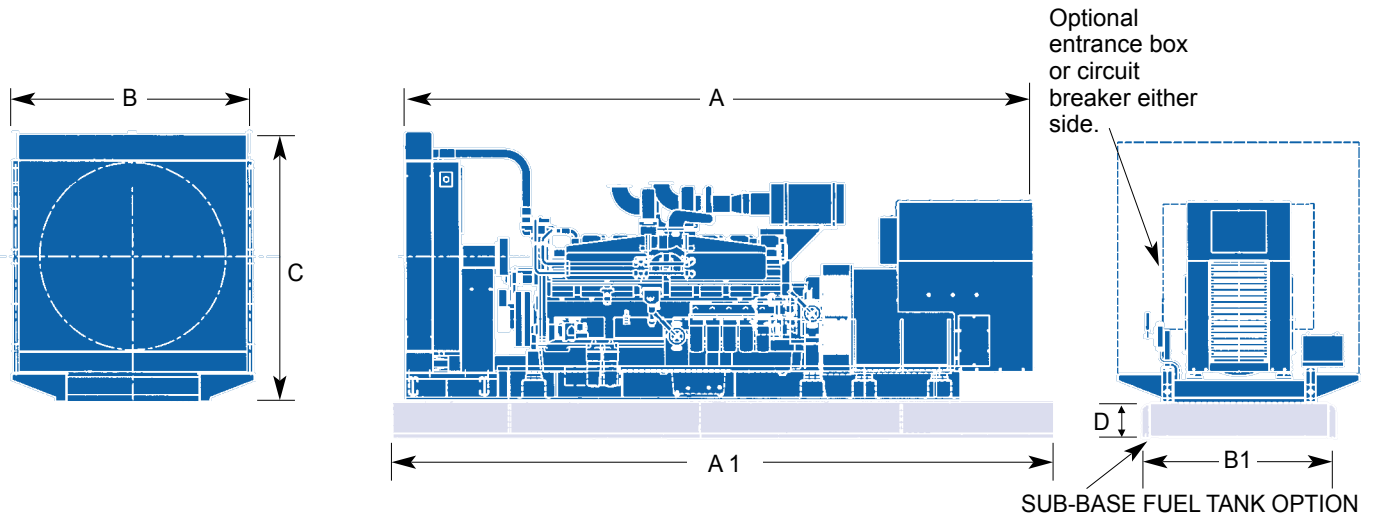

Model	Engine	Dimensions and Weights (mm/kg)						Set Weight kg Dry	Set Weight kg Wet	Tank Weight kg (wet)	Tank Weight kg (dry)
		A	A1	B1	B	C	D				
DFLC	KTA50G3	5290	5690	1640	2000	2238	300	9743	10300	2755	1075
DFLG	KTA50G6	5290	5690	1640	2000	2238	300	9743	10300	2755	1075
DFLH	KTA50G7	5455	5690	1640	2033	2241	300	9943	10646	2755	1075
DFLE	KTA50G8	5866	5690	1640	2033	2333	300	11140	11700	2755	1075
DFLE	*KTA50G8	5880	5690	1640	2033	2771	300	11540	12100	2755	1075

*With 50°C ambient radiator

Floor mounted circuit breaker and load terminal cubicle (for use above 2000 amps)			
Capacity amps	Width mm	Depth mm	Height mm
1600	1000	1050	1500
2000	1000	1050	1500
2500	1000	1050	1500

Set weights are **without** sub-base tank.

Dimensions and weights are for **guidance** only. Do not use for installation design. Ask for certified drawings on your specific application. Specifications may change without notice.



See your distributor for more information.

Cummins Power Generation Limited
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0)1843 255000
 Fax: +44 (0)1843 255902
 Email: cpg.uk@cummins.com
 www: cumminspower.com

Standard and custom made generating sets from 30 kVA to 2500 kVA

Cummins is a registered trademark of Cummins Engine Company